

# SDS800X HD



## Digital Storage Oscilloscope

Data Sheet

EN01C



SDS804X HD  
SDS814X HD  
SDS824X HD

SDS802X HD  
SDS812X HD  
SDS822X HD

## Product Overview

SIGLENT's SDS800X HD series high resolution digital storage oscilloscopes are based on 2 GSa/s, 12-bit Analog-Digital Converters and front ends with excellent noise floor performance. They are available in bandwidths of 200 MHz, 100 MHz and 70MHz, have maximum record length of 100 Mpts, and display 2/4 analog channels + 16 digital channels mixed signal analysis ability.

The SDS800X HD series employs Siglent's SPO technology with a maximum waveform capture rate of up to 120,000 wfm/ s (Normal mode, up to 500,000 wfm/s in Sequence mode), 256-level intensity grading display function plus a color temperature display mode. It also employs an innovative digital trigger system with high sensitivity and low jitter. The trigger system supports multiple powerful triggering modes including serial bus triggering. Tools such as History waveform recording, Search and Navigate functions, Mask Test, Bode Plot, Power Analysis allow for extended waveform records to be captured, stored, and analyzed. An impressive array of measurement and math capabilities, serial decoding as well as an optional 25 MHz arbitrary waveform generator are also features of the SDS800X HD.

The 7" display capacitive touch screen supports multi-touch gestures, with the addition of user-friendly UI design, can greatly improve the operation efficiency. It also supports mouse control, and remote web control over LAN.

## Key Features



- 12-bit High Resolution
  - 12-bit Analog-Digital Converters with sample rate up to 2 GSa/s
  - Front ends with 70  $\mu$ Vrms noise floor @ 200 MHz bandwidth
- 2/4 analog channels, up to 200 MHz bandwidth
- SPO technology
  - Waveform capture rate up to 120,000 wfm/s (Normal mode), and 500,000 wfm/s (Sequence mode)
  - Supports 256-level intensity grading and color temperature display modes
  - Up to 100 Mpts record length
  - Digital trigger system
- Intelligent trigger: Edge, Slope, Pulse width, Window, Runt, Interval, Dropout, Pattern, Video (HDTV supported) , Qualified, Nth edge, Delay, Setup/Hold time.
- Serial bus triggering and decoder, supports protocols I<sup>2</sup>C, SPI, UART, CAN, LIN
- Segmented acquisition (Sequence) mode, dividing the maximum record length into multiple segments (up to 80,000), according to trigger conditions set by the user, with a very small dead time between segments to capture the qualifying event
- History waveform record (History) function, the maximum recorded waveform length is 80,000 frames
- Automatic measurements on 50+ parameters, supports statistics with histogram, track, trend, Gating measurement, and measurements on Math, History and Ref
- 4 Math traces (2 Mpts FFT, addition, subtraction, multiplication, division, integration, differential, square root, etc.), supports formula editor
- Abundant data analysis functions such as Search, Navigate, Counter, Bode Plot and Power Analysis
- High Speed hardware-based Mask Test function, with Mask Editor tool for creating user-defined masks
- 16 digital channels (optional)
- 25 MHz waveform generator(optional)
- 7" TFT-LCD display with 1024 \* 600 resolution; Capacitive touch screen supports multi-touch gestures
- Interfaces include: USB Hosts, USB Device (USBTMC), LAN (VXI-11/Telnet/Socket), Pass/Fail, Trigger Out
- Built-in web server supports remote control over the LAN port using a web browser. Supports SCPI remote control commands. Supports external mouse and keyboard. Supports NTP.

## Models and Key Specifications


| Model                               | SDS804X HD<br>SDS802X HD   | SDS814X HD<br>SDS812X HD             | SDS824X HD<br>SDS822X HD  |
|-------------------------------------|--|--------------------------------------|---|
| Analog channels                     | 4 (4CH Series: SDS804X HD, SDS814X HD, SDS824X HD),<br>2 (2CH Series: SDS802X HD, SDS812X HD, SDS822X HD)  |                                      |   |
| Bandwidth                           | 70 MHz   | 100 MHz                              | 200 MHz   |
| Vertical resolution                 | 12-bit   |                                      |   |
| Sample rate (Max.)                  | One channel mode: 2 GSa/s,<br>Two channel mode: 1 GSa/s,<br>Four channel mode: 500 MSa/s   |                                      |   |
| Memory depth (Max.)                 | One channel mode: 50 Mpts/ch,<br>Two channel mode: 25 Mpts/ch,<br>Four channel mode: 10 Mpts/ch  |                                      | One channel mode:<br>100 Mpts/ch,<br>Two channel mode: 50 Mpts/ch,<br>Four channel mode: 25 Mpts/ch |
| Waveform capture rate (Max.)        | Normal mode : 80,000 wfm/s;<br>Sequence mode : 500,000 wfm/s   |                                      | Normal mode : 120,000 wfm/s;<br>Sequence mode : 500,000 wfm/s                                       |
| Trigger type                        | Edge, Slope, Pulse width, Window, Runt, Interval, Dropout, Pattern, Video, Qualified, Nth edge, Delay, Setup/Hold time, Serial   |                                      |   |
| Serial trigger and decode(Standard) | I <sup>2</sup> C, SPI, UART, CAN, LIN  |                                      |   |
| Measurement                         | 50+ parameters, statistics, histogram, trend, and track supported  |                                      |   |
| Math                                | 4 traces<br>2 Mpts FFT, Filter, +, -, x, ÷, ∫dt, d/dt, √, Identity, Negation, Absolute, Sign, ex, 10x, ln, lg, Interpolation, MaxHold, MinHold, ERES, Average. Supports formula editor |                                      |   |
| Data analysis                       | Search, Navigate, History, Mask test, Counter, Bode plot, and Power analysis   |                                      |   |
| Digital channel (optional)          | 16-channel; maximum sample rate up to 1 GSa/s; record length up to 10 Mpts   |                                      |   |
| USB AWG module (option)             | One channel, 25 MHz, sample rate of 125 MHz, wave length of 16 kpts, isolated output   |                                      |   |
| I/O                                 | USB 2.0 Host x2, USB 2.0 Device, 10 M / 100 M LAN, Auxiliary output (TRIG OUT, PASS/FAIL), SBUS (Siglent MSO)  |                                      |   |
| Probe (Standard)                    | Passive probe PB470 for each channel   | Passive probe PP510 for each channel | Passive probe PP215 for each channel  |
| Display                             | 7 TFT-LCD with capacitive touch screen (1024*600)  |                                      |   |

## Functions & Characteristics


### 12-bit High Resolution

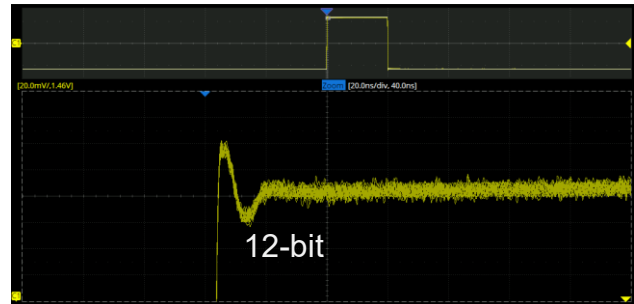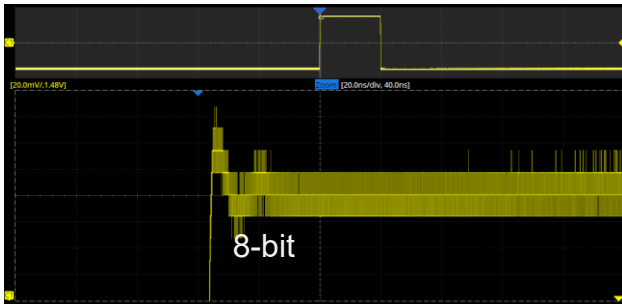

Vertical & Horizontal Zoom along with a large memory depth make the most out of 12-bit ADC resolution. Engineers can observe waveform overall and details simultaneously.

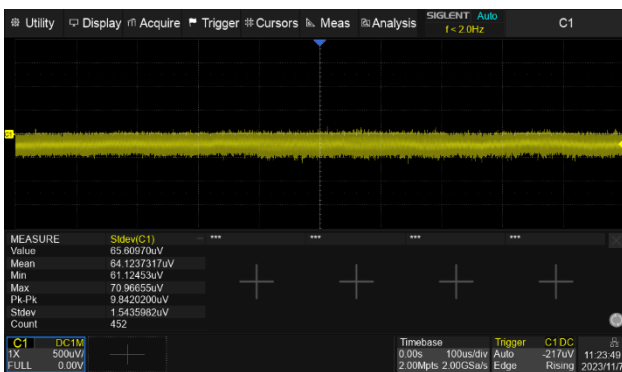

Low noise floor: Only 70  $\mu$ Vrms at 200 MHz bandwidth

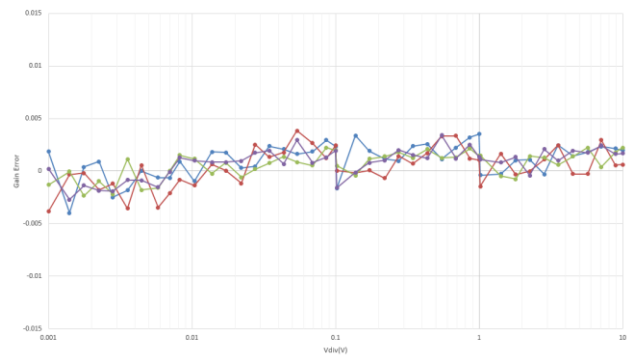


0.5% DC gain accuracy

### Excellent User Interface and User Experience




- 7" display with 1024x600 resolution
- Capacitive touch screen, supporting multi-touch gestures, can move or scale the waveform traces quickly by finger-touch movements, which greatly improves the operation efficiency
- Built-in WebServer supports remote control on a web page over LAN
- Supports external mouse and keyboard

## Optional Font Size to Meet Different Observation Needs

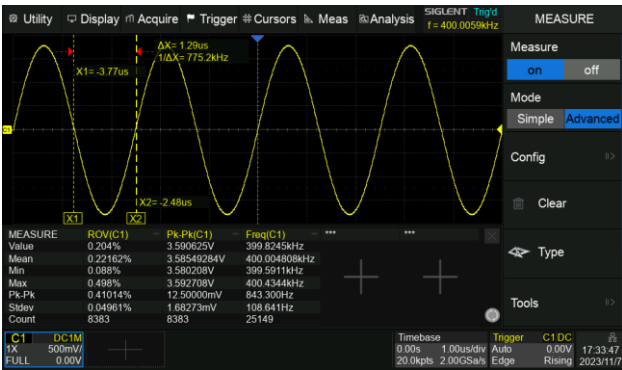


Large font size, suitable for use on devices.

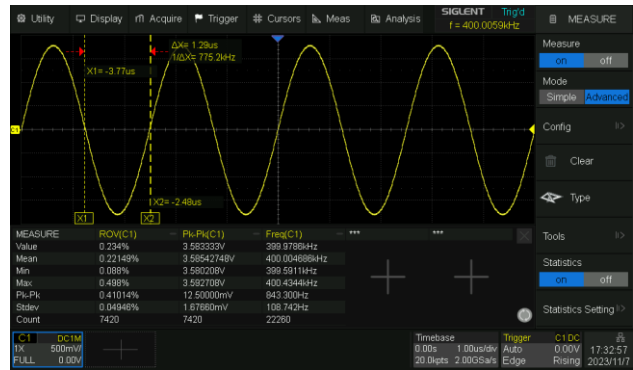


Small font size, exquisite display, suitable for large screen display scenarios such as VNC.

## High Waveform Update Rate

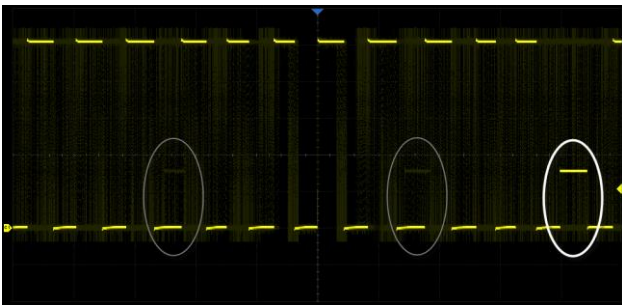


With a waveform update rate of up to 120,000 wfm/s, the oscilloscope can easily capture unusual or low-probability events. In Sequence mode, the waveform capture rate can reach 500,000 wfm/s.

## Deep Record Length

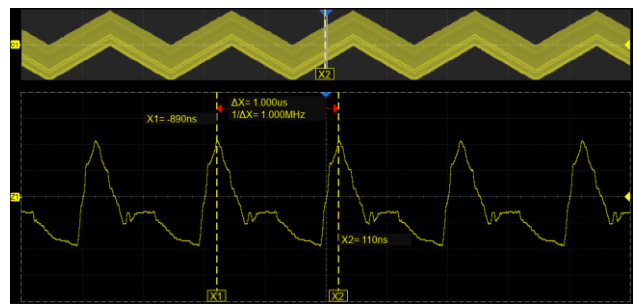


Using hardware-based Zoom technique and record length of up to 100 Mpts, users can select a slower timebase without compromising the sample rate, and then quickly zoom in to focus on the area of interest.

## Multiple Trigger Functions

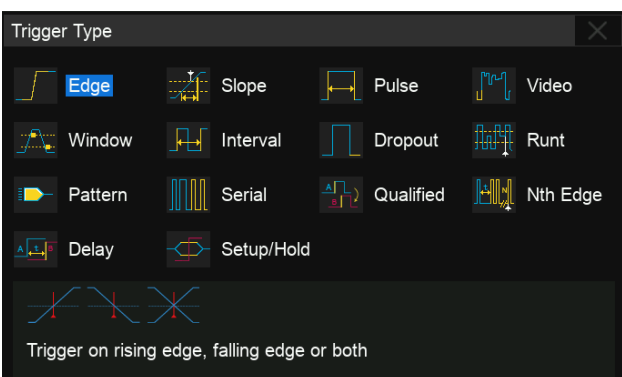


Edge, Slope, Pulse width, Video, Window, Runt, Interval, Dropout, Pattern, Qualified, Nth edge, Delay, Setup/Hold time, and Serial trigger.

## Advanced Math Function

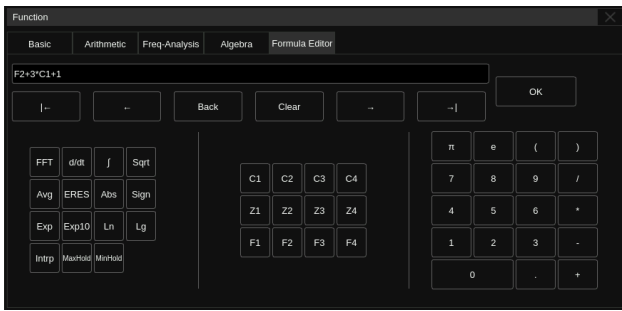

In addition to the traditional (+, -, X, /) operations, FFT, integration, differential, square root, and more are supported. Formula Editor is available for more complex operations. 4 math traces are available.

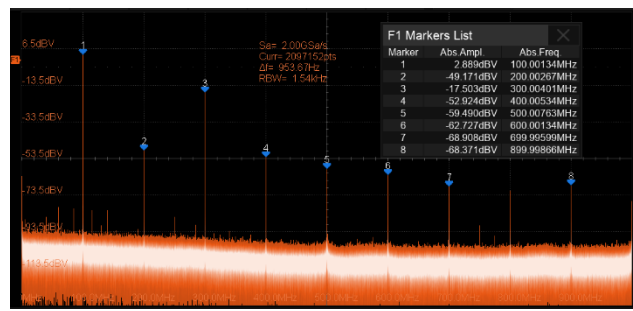


Hardware-accelerated FFT supports up to 2 Mpts operation. This provides high-frequency resolution with a fast refresh rate. The FFT function also supports a variety of window functions so that it can adapt to different spectrum measurement needs. Three modes (Normal, Average, and Max hold) can satisfy different requirements for observing the power spectrum. Auto peak detection and markers are supported.

## Measurements of a Variety of Parameters



Parameter measurements include 4 categories: horizontal, vertical, miscellaneous, and CH delay providing a total of 50+ different types of measurements. Measurements can be performed within a specified gate period. Measurements on Math, Reference, and History frames are supported.


## Parameter Statistics Function

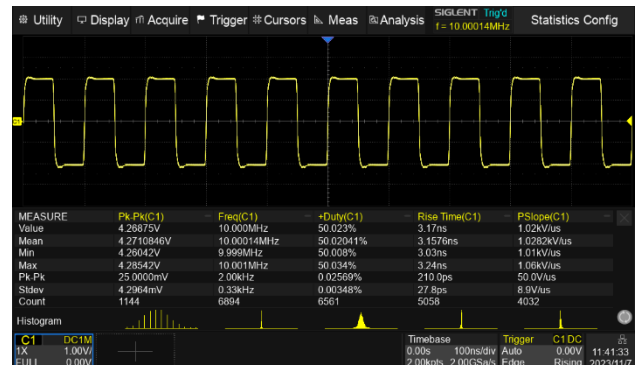

Statistics show the current value, maximum value, minimum value, standard deviation, and mean value. A histogram is available to show the probability distribution of a parameter. Trend and Track are available to show the parameter value vs. time.


For horizontal parameters such as period, all results are extracted from a frame, instead of just calculating the first one. This accelerates statistics on horizontal measurements much more and enables distribution observation in a frame using Histogram and Track.

## History Mode

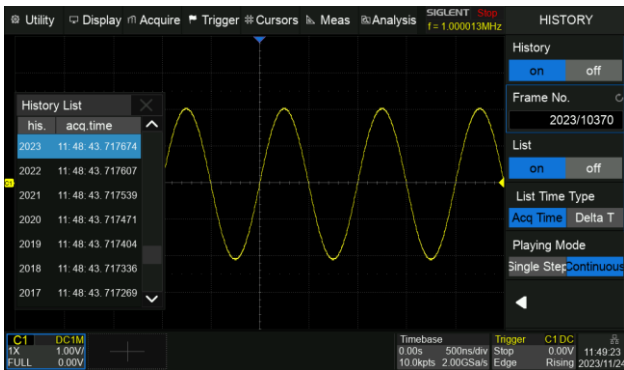


History function can record up to 80,000 frames of waveforms. The recording is executed automatically so that the customer can playback the history waveforms at any time to observe unusual events and quickly locate the area of interest using the cursors or measurements.

## Sequence Mode

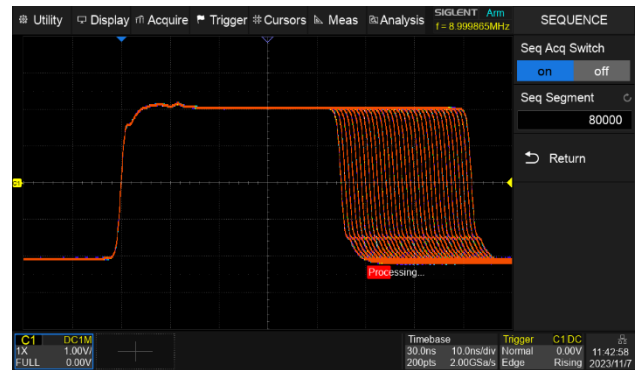


Segmented memory collection will store the waveform into multiple memory segments (up to 80,000) and each segment will store a triggered waveform as well the dead time information. The interval between segments can be as small as 2  $\mu$ s. All of the segments can be played back using the History function.

## Search and Navigate

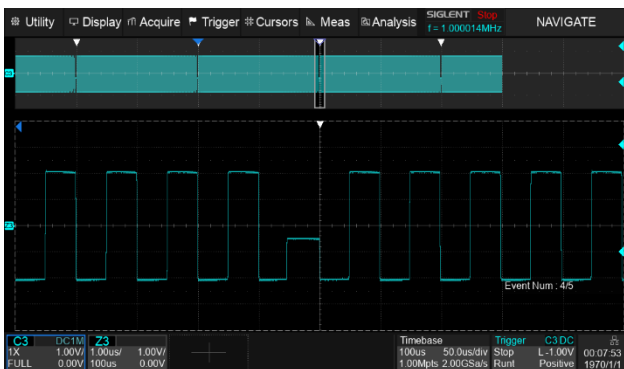


The oscilloscope can search events specified by the user in a frame. Events flagged by the Search can be recalled automatically using Navigate. It can also navigate by time (delay position) and history frames.

## Serial Bus Decode

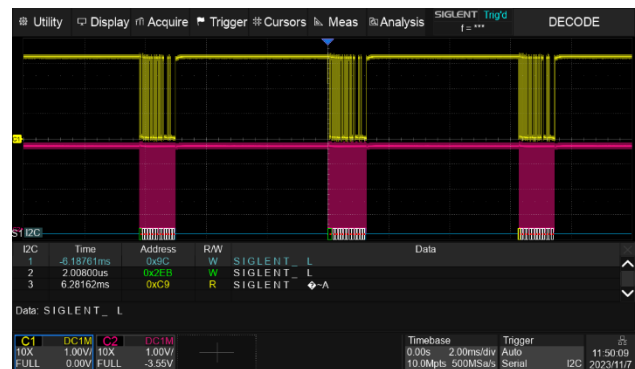


Display the decoded characters through the events list. Bus protocol information can be quickly and intuitively displayed in tabular form. I<sup>2</sup>C, SPI, UART, CAN, LIN are supported.

## Hardware-based High-Speed Mask Test Function

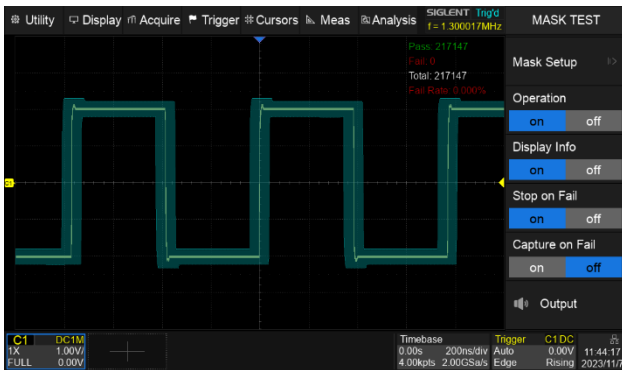

The oscilloscope utilizes a hardware-based Mask Test function, performing up to 80,000 Pass / Fail decisions each second. It is easy to generate user-defined test templates to provide trace mask comparisons, making it suitable for long-term signal monitoring or automated production line testing.

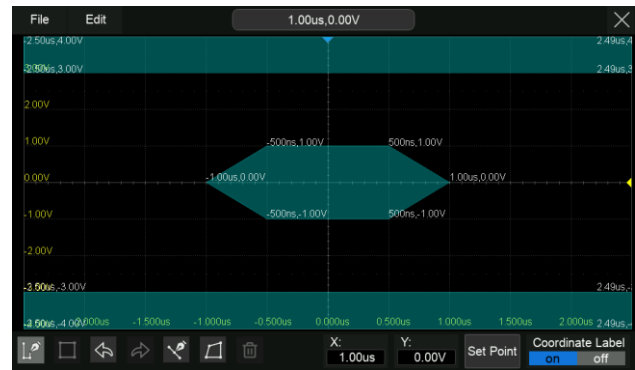

Built-in Mask Editor application helps to create custom masks.

## Bode Plot



SDS800X HD can control the USB AWG module or control an independent SIGLENT SDG instrument, scan a device's amplitude and phase frequency response, and display the data as a Bode Plot. There is also a Vari-level Mode for accurately measuring Power Supply Control Loop Response (PSRR).


## Power Analysis (Optional)



The Power Analysis option provides a full suite of power measurements and analysis, which greatly improve the measurement efficiency in switching power supplies and power devices design.




### Digital Channels / MSO (Optional)

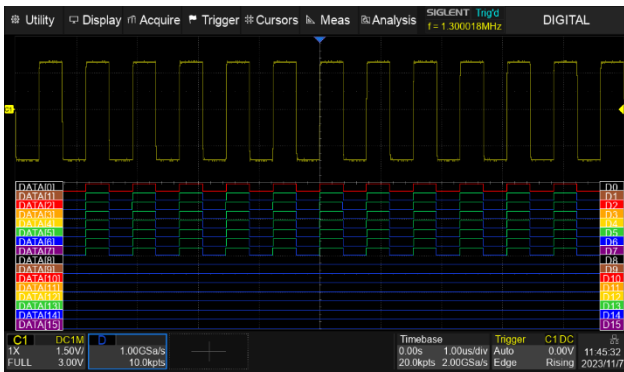

Four analog channels plus 16 digital channels enable users to acquire and trigger the waveforms then analyze the pattern, simultaneously with one instrument.

### USB AWG module (Optional)

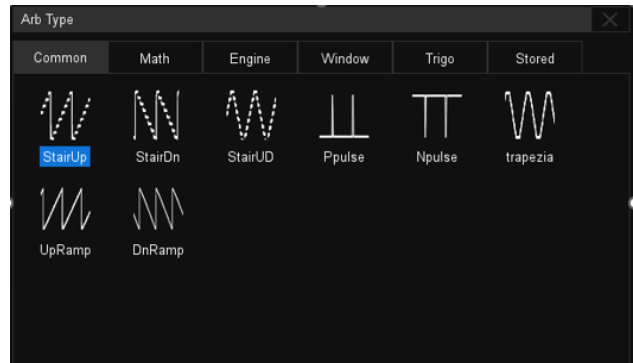

The USB waveform generator can output waveforms with up to 25 MHz frequency and  $\pm 3$  V amplitude. Six basic waveforms together with multiple types of predefined waveforms and as user-defined arbitrary waveforms are supported.

## Specifications

All specifications are not guaranteed unless the following conditions are met:

- The oscilloscope calibration period is current
- The oscilloscope has been working continuously for at least 30 minutes at the specified temperature (18°C ~ 28°C)

| Acquire (analog)     |   |
|----------------------|---|
| Sample rate          | One channel mode: 2 GSa/s,<br>Two channel mode: 1 GSa/s,<br>Four channel mode: 500 MSa/s  |
| Memory depth         | 70M and 100M Series:<br>One channel mode: 50 Mpts/ch<br>Two channel mode: 25 Mpts/ch<br>Four channel mode: 10 Mpts/ch<br>200M Series:<br>One channel mode: 100 Mpts/ch<br>Two channel mode: 50 Mpts/ch<br>Four channel mode: 25 Mpts/ch |
| Waveform update rate | 70M and 100M Series:<br>Normal mode : up to 80,000 wfm/s<br>Sequence mode : up to 500,000 wfm/s<br>200M Series:<br>Normal mode : up to 120,000 wfm/s<br>Sequence mode : up to 500,000 wfm/s   |
| Intensity grading    | 256-level   |
| Peak detect          | 2 ns  |
| Sequence             | Up to 80,000 segments, interval between triggers = 2 $\mu$ s min.   |
| History              | Up to 80,000 frames   |
| Interpolation        | sinx/x, x   |

| Vertical (analog)   |   |
|---|---|
| Channel   | 4 (4CH Series: SDS804X HD, SDS814X HD, SDS824X HD),<br>2 (2CH Series: SDS802X HD, SDS812X HD, SDS822X HD)                   |
| Bandwidth (-3 dB) @50 $\Omega$ <sup>*1</sup>                      | SDS804X HD, SDS802X HD: 70 MHz<br>SDS814X HD, SDS812X HD: 100 MHz<br>SDS824X HD, SDS822X HD: 200 MHz                        |
| Flatness@50 $\Omega$  | DC - 10% (BW): $\pm$ 1 dB<br>10% - 50% (BW): $\pm$ 2 dB<br>50% - 100% (BW): +2 dB / -3 dB                                   |
| Rise time@50 $\Omega$ (typical)                                   | Typical 5 ns (SDS804X HD, SDS802X HD)<br>Typical 3.5 ns (SDS814X HD, SDS812X HD)<br>Typical 1.8 ns (SDS824X HD, SDS822X HD) |
| Resolution  | 12-bit  |
| ENOB <sup>*2</sup> (typical)                                      | 8.4-bit   |
| Noise floor <sup>*3</sup> (rms, @50 $\Omega$ , typical, 1 mV/div) | 70 $\mu$ V(Full Bandwidth)  |
| Range   | 8 divisions   |
| Vertical scale (probe 1X)   | 1 M $\Omega$ : 0.5 mV/div – 10 V/div  |

|  |  |                                |
|--|--|--------------------------------|
| DC gain accuracy                           | 0.5 mV/div ~ 4.95 mV/div:  | ±1.5 %                         |
|  | 5 mV/div ~ 10 V/div:   | ±0.5 % (typical)<br>±1 % (max) |
| Offset accuracy                            | ± (0.5% of the offset setting + 0.5% of full scale + 1 mV)   |                                |
| Offset range (probe 1X)                    | 1 MΩ:<br>0.5 mV/div ~ 5 mV/div: ±1.6 V;<br>5.1 mV/div ~ 10 mV/div: ±4 V;<br>10.2 mV/div ~ 100 mV/div: ±8 V;<br>102 mV/div ~ 1 V/div: ±80 V;<br>1.02 V/div ~ 10 V/div: ±400 V |                                |
| Bandwidth limit                            | Hardware Bandwidth limit: 20 MHz, 200 MHz  |                                |
| Low frequency response (AC coupling -3 dB) | 2 Hz (typical)   |                                |
| Overshoot (150 ps edge @50 Ω, typical)     | 10%  |                                |
| Coupling                                   | DC, AC, GND  |                                |
| Impedance                                  | 1 MΩ: (1 MΩ±2%)    (17 pF±2 pF)  |                                |
| Max. input voltage                         | 1 MΩ ≤ 400 Vpk (DC + AC), DC ~ 10 kHz  |                                |
| SFDR                                       | ≥ 35dBc  |                                |
| CH to CH Isolation (@50Ω)                  | DC ~ Max BW: > 40dB  |                                |
| Probe attenuation                          | 1X, 10X, 100X, Custom  |                                |

\* 1: SDS800X HD has no internal 50 Ω. The external 50 Ω should be taken

\* 2: 24.99 MHz input, -0.25 dBFS, 20 mV/div, 50 Ω input impedance

\* 3: Use the "Stdev" measurement

| Horizontal         |  |
|--------------------|--|
| Time scale         | 70M and 100M Series: 2 ns/div ~ 1000 s/div<br>200M Series: 1 ns/div ~ 1000 s/div |
| Range              | 10 divisions   |
| Display mode       | Y-T, X-Y, Roll   |
| Roll mode          | ≥ 50 ms/div  |
| Skew (CH1~CH4)     | < 100 ps   |
| Time base accuracy | ±25 ppm  |

| <b>Trigger</b>                          |   |
|---|---|
| Mode                                    | Auto, Normal, Single  |
| Level                                   | Internal : $\pm 4.1$ div from the center of the screen  |
| Hold off range                          | By time : 8 ns ~ 30 s (8 ns step)   |
| Coupling                                | AC<br>DC<br>LFRJ<br>HFRJ<br>Noise RJ  |
| Coupling frequency response (CH1 ~ CH4) | DC : Passes all components of the signal<br>AC : Blocks DC components and attenuates signals below 8Hz<br>LFRJ : Blocks the DC component and attenuates the low-frequency components below 2 MHz<br>HFRJ : Attenuates the high-frequency components above 2.4 MHz |
| Accuracy (typical)                      | CH1 ~ CH4: $\pm 0.2$ div  |
| Sensitivity                             | CH1 ~ CH4 :      DC ~ Max BW : 0.6 div  |
| Jitter                                  | CH1 ~ CH4 : < 100ps   |
| Displacement                            | Pre-Trigger : 0 ~ 100% memory<br>Delay-Trigger : 0 ~ 10,000 div   |
| <b>Edge Trigger</b>                     |   |
| Source                                  | CH1 ~ CH4 / AC Line / D0 ~ D15  |
| Slope                                   | Rising, Falling, Alternating  |
| <b>Slope Trigger</b>                    |   |
| Source                                  | CH1 ~ CH4   |
| Slope                                   | Rising, Falling   |
| Limit range                             | <, >, in range, out of range  |
| Time range                              | 2 ns ~ 20 s, Resolution = 1 ns  |
| <b>Pulse Width Trigger</b>              |   |
| Source                                  | CH1 ~ CH4 / D0 ~ D15  |
| Polarity                                | +width, -width  |
| Limit range                             | <, >, in range, out of range  |
| Time range                              | 2 ns ~ 20 s, Resolution = 1 ns  |
| <b>Video Trigger</b>                    |   |
| Source                                  | CH1 ~ CH4   |
| Standard                                | NTSC, PAL, 720p/50, 720p/60, 1080p/50, 1080p/60, 1080i/50, 1080i/60, Custom   |
| Synchronization                         | Any, Select   |
| Trigger condition                       | Line, Field   |
| <b>Window Trigger</b>                   |   |
| Source                                  | CH1 ~ CH4   |
| Window type                             | Absolute, Relative  |

|                           |  |
|---------------------------|--|
| <b>Interval Trigger</b>   |  |
| Source                    | CH1 ~ CH4 / D0 ~ D15                           |
| Slope                     | Rising, Falling                                |
| Limit range               | <, >, in range, out of range                   |
| Time range                | 2 ns ~ 20 s, Resolution = 1 ns                 |
| <b>Dropout Trigger</b>    |  |
| Source                    | CH1 ~ CH4 / D0 ~ D15                           |
| Timeout type              | Edge, State                                    |
| Slope                     | Rising, Falling                                |
| Time range                | 2 ns ~ 20 s, Resolution = 1 ns                 |
| <b>Runt Trigger</b>       |  |
| Source                    | CH1 ~ CH4                                      |
| Polarity                  | Positive, Negative                             |
| Limit range               | <, >, in range, out of range                   |
| Time range                | 2 ns ~ 20 s, Resolution = 1 ns                 |
| <b>Pattern Trigger</b>    |  |
| Source                    | CH1 ~ CH4 / D0 ~ D15                           |
| Pattern setting           | Don't Care, Low, High                          |
| Logic                     | AND, OR, NAND, NOR                             |
| Limit range               | <, >, in range, out of range                   |
| Time range                | 2 ns ~ 20 s, Resolution = 1 ns                 |
| <b>Qualified Trigger</b>  |  |
| Type                      | State, State with Delay, Edge, Edge with Delay |
| Qualified source          | CH1 ~ CH4                                      |
| Edge source               | CH1 ~ CH4                                      |
| Qualify state             | Low, High                                      |
| Qualify edge              | Rising, Falling                                |
| Limit range               | <, >, in range, out of range                   |
| Time range                | 2 ns ~ 20 s, Resolution = 1 ns                 |
| <b>Nth Edge Trigger</b>   |  |
| Source                    | CH1 ~ CH4                                      |
| Slope                     | Rising, Falling                                |
| Idle time                 | 8 ns ~ 20 s, Resolution = 1 ns                 |
| Edge number               | 1 ~ 65535                                      |
| <b>Delay Trigger</b>      |  |
| Source A                  | CH1 ~ CH4                                      |
| Source B                  | CH1 ~ CH4                                      |
| Slope                     | Rising, Falling                                |
| Limit range               | <, >, in range, out of range                   |
| Time range                | 2 ns ~ 20 s, Resolution = 1 ns                 |
| <b>Setup/Hold Trigger</b> |  |
| Option                    | Setup, Hold                                    |
| CLK source                | CH1 ~ CH4                                      |

|                       |  |
|-----------------------|--|
| CLK slope             | Rising, Falling  |
| Data source           | CH1 ~ CH4  |
| Data state            | Low, High  |
| Limit range           | <, >, in range, out of range   |
| Time range            | 2 ns ~ 20 s, Resolution = 1 ns   |
| <b>Serial Trigger</b> |  |
| Source                | CH1 ~ CH4 / D0 ~ D15   |
| Protocol              | I <sup>2</sup> C, SPI, UART, CAN, LIN                                    |
| I <sup>2</sup> C      | Type : Start, Stop, Restart, No Ack, EEPROM, Address & Data, Data Length |
| SPI                   | Type : Data  |
| UART                  | Type : Start, Stop, Data, Parity Error                                   |
| CAN                   | Type : All, Remote, ID, ID+Data, Error                                   |
| LIN                   | Type : Break, Frame ID, ID+Data, Error                                   |

| Serial Decoder   |  |
|------------------|--|
| Decoders         | 2  |
| Threshold        | -4.5 ~ 4.5 div   |
| List             | 1 ~ 7 lines  |
| Decoder type     | Full duplex  |
| I <sup>2</sup> C |  |
| Source           | CH1 ~ CH4 / D0 ~ D15   |
| Signal           | SCL, SDA   |
| Address          | 7-bit, 10-bit  |
| SPI              |  |
| Source           | CH1 ~ CH4 / D0 ~ D15   |
| Signal           | CLK, MISO, MOSI, CS  |
| Edge select      | Rising, Falling  |
| Chip select      | Active high, Active low, Clock timeout                             |
| Bit order        | LSB, MSB   |
| UART             |  |
| Source           | CH1 ~ CH4 / D0 ~ D15   |
| Signal           | RX, TX   |
| Data width       | 5-bit, 6-bit, 7-bit, 8-bit   |
| Parity check     | None, Odd, Even, Mark, Space                                       |
| Stop bit         | 1-bit, 1.5-bit, 2-bit  |
| Idle level       | Low, High  |
| Bit order        | LSB, MSB   |
| CAN              |  |
| Source           | CH1 ~ CH4 / D0 ~ D15   |
| LIN              |  |
| LIN version      | Ver 1.3, Ver 2.0   |
| Source           | CH1 ~ CH4 / D0 ~ D15   |
| Baud rate        | 600 bps, 1200 bps, 2400 bps, 4800 bps, 9600 bps, 19200 bps, Custom |

| Measurement           |  |
|-----------------------|--|
| Automatic Measurement |  |
| Source                | CH1 ~ CH4, D0 ~ D15, Z1 ~ Z4, F1 ~ F4, Ref, History  |
| Mode                  | Simple, Advanced   |
| Range                 | Screen<br>Gated: inside screen, definable with separate Gate cursors   |
| Custom threshold      | Upper, Middle, Lower   |
| Vertical parameters   | Max, Min, Pk-Pk, Top, Base, Amplitude, Mean, Cycle Mean, Stdev, Cycle Stdev, RMS, Cycle RMS, Median, Cycle Median, FOV, FPRE, ROV, RPRE, Level@Trigger |

|                          |   |
|--------------------------|---|
| Horizontal parameters    | Period, Frequency, Time@max, Time@min, +Width, -Width, 10-90%Rise time, 90-10%Fall time, Rise time, Fall time, +Burst Width, -Burst Width, +Duty Cycle, -Duty Cycle, Delay, Time@Middle, Cycle-Cycle jitter |
| Miscellaneous parameters | +Area@DC, -Area@DC, Area@DC, Absolute Area@DC, +Area@AC, -Area@AC, Area@AC, Absolute Area@AC, Cycles, Rising Edges, Falling Edges, Edges, Positive pulses, Negative pulses, Positive Slope, Negative Slope  |
| Delay parameters         | Phase, FRFR, FRFF, FFFR, FFFF, FRLR, FRLF, FFLR, FFLF, Skew, Tsu@R, Tsu@F, Th@R, Th@F   |
| Statistics               | Current, Mean, Min, Max, Pk-Pk, Sdev, Count, Histogram, Trend, Track  |
| Statistics count         | Unlimited, 1 ~ 1024   |
| <b>Cursors</b>           |   |
| Source                   | CH1 ~ CH4, D0 ~ D15, F1 ~ F4, Ref   |
| Type                     | Manual : Time X1, X2, (X1-X2), (1/ΔT); Vertical Y1, Y2, (Y1-Y2)<br>Track: Time X1, X2, (X1-X2)<br>Measure: indicates the measurement on specific parameter  |

| <b>Math</b> |   |
|-------------|---|
| Trace       | F1 ~ F4   |
| Source      | CH1 ~ CH4, Z1 ~ Z4, F1 ~ F4   |
| Operation   | FFT, Filter, +, -, x, ÷, ∫dt, d/dt, √, Identity, Negation,  x , Sign, ex, 10x, ln, lg, Interpolation, Max hold, Min hold, ERES, Average, Formula editor   |
| FFT         | Length: 2 Mpts, 1 Mpts, 512 kpts, 256 kpts, 128 kpts, 64 kpts, 32 kpts, 16 kpts, 8 kpts, 4 kpts, 2 kpts, 1 kpts<br>Window: Rectangle, Blackman, Hanning, Hamming, Flattop<br>Display: Full Screen, Split, Exclusive<br>Mode: Normal, Max hold, Average<br>Tools: Peaks, Markers |

| <b>Analysis</b>  |  |
|------------------|--|
| <b>Search</b>    |  |
| Source           | CH1 ~ CH4, History                           |
| Mode             | Edge, Slope, Pulse, Interval, Runt           |
| Copy setting     | Copy from trigger, Copy to trigger           |
| Navigate         |  |
| Type             | Search event, Time, History frame            |
| <b>Mask Test</b> |  |
| Source           | CH1 ~ CH4, Z1 ~ Z4                           |
| Mask creating    | Auto (Create mask), Customized (Mask Editor) |
| Mask test speed  | Up to 80,000 frames/s                        |
| <b>Bode Plot</b> |  |
| Source           | CH1 ~ CH4                                    |



|                                  |   |
|----------------------------------|---|
| Supported signal sources         | SAG1021I (Connection: USB),<br>SDG series waveform generators (Connection: USB, LAN)  |
| Sweep type                       | Simple, Vari-level  |
| Frequency                        | Mode: Linear, Logarithmic<br>Range: 10 Hz ~ 120 MHz   |
| Measure                          | Upper cutoff frequency, Lower cutoff frequency, Bandwidth, Gain margin,<br>Phase margin   |
| <b>Power Analysis (optional)</b> |   |
| Measure                          | Power quality, Current Harmonics, Inrush current, Switching loss, Slew rate,<br>Modulation, Output ripple, Turn on/turn off, Transient response, PSRR, SOA,<br>Efficiency(four channel series only) |
| <b>Counter</b>                   |   |
| Source                           | CH1 ~ CH4   |
| Frequency resolution             | 7 digits  |
| Totalizer                        | Counter on edges, supports Gate and Trigger   |

| <b>Digital Channels (optional)</b> |  |
|------------------------------------|--|
| Max. sampling rate                 | 1 GSa/s  |
| Memory depth                       | 10 Mpts/ch   |
| Min. detectable pulse width        | 3.3 ns   |
| Level group                        | D0 ~ D7, D8 ~ D15  |
| Level range                        | -8 V ~ +8 V  |
| Logic type                         | TTL, CMOS, LVCMOS3.3, LVCMOS2.5, Custom  |
| Skew                               | D0 ~ D15: $\pm 1$ sampling interval<br>Analog to Digital(Triggered On Digital): $\pm (1 \text{ sampling interval} + 1 \text{ ns})$<br>Digital to Analog(Triggered On Analog): $\pm 4 \text{ ns}$ |

| <b>USB AWG Module (optional)</b> |  |
|----------------------------------|--|
| Channels                         | 1  |
| Max. output frequency            | 25 MHz   |
| Sampling rate                    | 125 MSa/s  |
| Frequency resolution             | 1 $\mu$ Hz   |
| Frequency accuracy               | $\pm 50 \text{ ppm}$   |
| Vertical resolution              | 14 bit   |
| Amplitude range                  | -1.5 V ~ +1.5 V (into 50 $\Omega$ )<br>-3 V ~ +3 V (into High-Z) |
| Waveforms                        | Sine, Square, Ramp, Pulse, DC, Noise, 45 Arbitrary               |
| Output                           | 50 $\Omega \pm 2\%$  |

|                          |   |
|--------------------------|---|
| Impedance                |   |
| Protection               | Over voltage protection, Current limit                                      |
| <b>Sine</b>              |   |
| Frequency                | 1 $\mu$ Hz ~ 25 MHz   |
| Offset accuracy (10 kHz) | $\pm(1\% \times \text{offset setting value} + 3 \text{ mVpp})$              |
| Amplitude flatness       | $\pm 0.3 \text{ dB}$ , compare to 10 kHz, 2.5 Vpp into 50 $\Omega$          |
| SFDR                     | DC ~ 1 MHz                    -60 dBc                                       |
|                          | 1 MHz ~ 5 MHz                -55 dBc  |
|                          | 5 MHz ~ 25 MHz               -50 dBc  |
| Harmonic distortion      | DC ~ 5 MHz                    -50 dBc                                       |
|                          | 5 MHz ~ 25 MHz               -45 dBc  |
| <b>Square/Pulse</b>      |   |
| Frequency                | 1 $\mu$ Hz ~ 10 MHz   |
| Duty cycle               | 1% ~ 99%  |
| Edge                     | < 24 ns (10% ~ 90%)   |
| Overshoot                | < 3% (typical , 1 kHz, 1 Vpp)   |
| Pulse width              | > 50 ns   |
| Jitter (cycle-cycle)     | < 500 ps + 10 ppm   |
| <b>Ramp</b>              |   |
| Frequency                | 1 $\mu$ Hz ~ 300 kHz  |
| Linearity                | < 0.1% of Pk-Pk (typical, 1 kHz, 1 Vpp, 50% symmetry)                       |
| Channels                 | 0% ~ 100%   |
| <b>DC</b>                |   |
| Offset range             | $\pm 1.5 \text{ V}$ (into 50 $\Omega$ )                                     |
|                          | $\pm 3 \text{ V}$ (into Hi-Z)   |
| Accuracy                 | $\pm( \text{setting value}  \times 1\% + 3 \text{ mV})$                     |
| <b>Noise</b>             |   |
| Bandwidth (-3 dB)        | > 25 MHz  |
| <b>Arb</b>               |   |
| Frequency                | 1 $\mu$ Hz ~ 5 MHz  |
| Wave memory              | 16 kpts   |
| Sample rate              | 125 MSa/s   |
| Wave import              | From EasyWaveX, from U-disk, directly from waveform data of analog channels |

| I/O   |   |
|-------|---|
| Front | USB 2.0 Host,<br>SBUS: Siglent MSO,<br>Calibration Signal: 1 kHz, 3 V Square  |
| Rear  | USB 2.0 Host,<br>USB 2.0 Device,<br>LAN: 10/100MbaseT (RJ45),<br>Auxiliary Output: TRIG OUT (3.3 V LVCMOS), PASS/FAIL OUT (3.3 V TTL) |

| Display             |  |
|---------------------|--|
| Display type        | 7 TFT LCD with capacitive touch screen |
| Resolution          | 1024×600                               |
| Contrast (typical)  | 500:1                                  |
| Backlight (typical) | 500 nit                                |

| Display Setting      |   |
|----------------------|---|
| Range                | 8 x 10 grid   |
| Display type         | Dot, Vector   |
| Persistence time     | OFF, 1 s, 5 s, 10 s, 30 s, infinite   |
| Color display        | Normal, Color   |
| Language             | Simplified Chinese, Traditional Chinese, English, French, Japanese, German, Spanish, Russian, Italian, Portuguese |
| Built-in help system | Simplified Chinese, English   |

| Environmental                 |  |                            |                                   |
|-------------------------------|--|----------------------------|-----------------------------------|
| Temperature                   | Operating: 0 °C ~ 40 °C<br>Non-operating: -30 °C ~ 70 °C                                   |                            |                                   |
| Humidity                      | Operating: 5% ~ 90%RH, 30 °C, degraded to 50%RH at 50 °C<br>Non-operating: 5% ~ 95%        |                            |                                   |
| Altitude                      | Operating: ≤ 3,000 m, 25 °C<br>Non-operating: ≤15,000 m                                    |                            |                                   |
| Electromagnetic compatibility | Meets EMC directive (2014/30/EU), meets or exceeds IEC 61326-1:2012/EN61326-1:2013 (Basic) |                            |                                   |
|                               | Conducted disturbance  | CISPR 11/EN 55011          | CLASS A group 1<br>150 kHz-30 MHz |
|                               | Radiated disturbance   | CISPR 11/EN 55011          | CLASS A group 1<br>30 MHz-1 GHz   |
|                               | Electrostatic discharge (ESD)  | IEC 61000-4-2/EN 61000-4-2 | 4.0 kV (Contact),8.0 kV (Air)     |
|                               | Radio-frequency  | IEC 61000-4-3/EN           | 10 V/m (80 MHz to 1 GHz);         |

|        |  |                                  |  |
|--------|--|----------------------------------|--|
|        | electromagnetic field Immunity   | 61000-4-3                        | 3 V/m (1.4 GHz to 2 GHz);<br>1 V/m (2.0 GHz to 2.7 GHz)  |
|        | Electrical fast transients (EFT)   | IEC 61000-4-4/EN 61000-4-4       | 2kV (Input AC Power Ports)   |
|        | Surges   | IEC 61000-4-5/EN 61000-4-5       | 1kV (Line to line)<br>2kV (Line to ground)   |
|        | Radio-frequency continuous conducted Immunity  | IEC 61000-4-6/EN 61000-4-6       | 3 V, 0.15-80 MHz   |
|        | Voltage dips and interruptions   | IEC 61000-4-11/<br>EN 61000-4-11 | Voltage Dips:<br>0% UT during 1 cycle;<br>40% UT during 10/12 cycles;<br>70% UT during 25/30 cycles<br>Voltage interruptions:<br>0% UT during 250/300 cycles |
| Safety | UL 61010-1:2012/R: 2018-11; CAN/CSA-C22.2 No. 61010-1:2012/A1:2018-11.<br>UL 61010-2-030:2018; CAN/CSA-C22.2 No. 61010-2-030:2018. |                                  |  |
| RoHS   | EU 2015/863  |                                  |  |

| Power Supply              |  |
|---------------------------|--|
| Input voltage & frequency | 100 ~ 240 Vrms 50/60 Hz                              |
| Power consumption         | 80 W max., 40 W typical, 4 W typical in standby mode |

| Mechanical |   |
|------------|---|
| Dimensions | Length × Height × Width = 312 mm × 151 mm × 132.6 mm<br>(including knobs and supporting legs) |
| Weight     | Net Weight 2.6 kg, Gross Weight 3.8 kg  |



## Ordering Information



| Model      | Description           |
|------------|-----------------------|
| SDS824X HD | 200 MHz, 2 GSa/s, 4CH |
| SDS814X HD | 100 MHz, 2 GSa/s, 4CH |
| SDS804X HD | 70 MHz, 2 GSa/s, 4CH  |
| SDS822X HD | 200 MHz, 2 GSa/s, 2CH |
| SDS812X HD | 100 MHz, 2 GSa/s, 2CH |
| SDS802X HD | 70 MHz, 2 GSa/s, 2CH  |

| Standard Accessories       | Quantity  |
|----------------------------|-----------|
| USB cable                  | 1         |
| Quick start                | 1         |
| Passive probe              | 1/channel |
| Certificate of calibration | 1         |
| Power cord                 | 1         |

| Optional Accessories             | Part No.       |
|----------------------------------|----------------|
| AWG Software                     | SDS800XHD-FG   |
| USB Isolated AWG Module Hardware | SAG1021I       |
| 16 Channels MSO Software         | SDS800XHD-16LA |
| 16 Channels Logic Analyzer       | SLA1016        |
| Power Analysis Software          | SDS800XHD-PA   |
| Power Analysis Deskew Fixture    | DF2001A        |

## Accessories

| Accessories             | Picture   | Model            | Specifications &Description  |
|-------------------------|---|------------------|--|
| Demo Board              |  | STB-3 Test Board | Output signals including square, sine, AM, fast edge, pulse, PWM, I2C, CAN, LIN etc. Used in teaching and demonstrations.                              |
| USB Isolated AWG Module |  | SAG1021I         | Output Sine, Square, Ramp, pulse, Noise, DC and 45 built-in waveforms. The arbitrary waveforms can be accessed and edited by the EasyWave PC software. |

|  |   |                |   |
|--|---|----------------|---|
| <p>16 Channels<br/>Logic<br/>Analyzer</p>        |  | <p>SLA1016</p> | <p>Provides 16 digital channels by connecting the SBUS interface.</p> |
| <p>Power<br/>Analysis<br/>Deskew<br/>Fixture</p> |  | <p>DF2001A</p> | <p>Calibrates the phase between the current and voltage probes.</p>   |



## About SIGLENT

SIGLENT is an international high-tech company, concentrating on R&D, sales, production and services of electronic test & measurement instruments.

SIGLENT first began developing digital oscilloscopes independently in 2002. After more than a decade of continuous development, SIGLENT has extended its product line to include digital oscilloscopes, isolated handheld oscilloscopes, function/arbitrary waveform generators, RF/MW signal generators, spectrum analyzers, vector network analyzers, digital multimeters, DC power supplies, electronic loads and other general purpose test instrumentation. Since its first oscilloscope was launched in 2005, SIGLENT has become the fastest growing manufacturer of digital oscilloscopes. We firmly believe that today SIGLENT is the best value in electronic test & measurement.

### Headquarters:

SIGLENT Technologies Co., Ltd  
Add: Bldg No.4 & No.5, Antongda Industrial  
Zone, 3rd Liuxian Road, Bao'an District,  
Shenzhen, 518101, China  
Tel: + 86 755 3688 7876  
Fax: + 86 755 3359 1582  
Email: [sales@siglent.com](mailto:sales@siglent.com)  
Website: [int.siglent.com](http://int.siglent.com)

### North America:

SIGLENT Technologies America, Inc  
6557 Cochran Rd Solon, Ohio 44139  
Tel: 440-398-5800  
Toll Free: 877-515-5551  
Fax: 440-399-1211  
Email: [info@siglentna.com](mailto:info@siglentna.com)  
Website: [www.siglentna.com](http://www.siglentna.com)

### Europe:

SIGLENT Technologies Germany GmbH  
Add: Staetzlinger Str. 70  
86165 Augsburg, Germany  
Tel: +49(0)-821-666 0 111 0  
Fax: +49(0)-821-666 0 111 22  
Email: [info-eu@siglent.com](mailto:info-eu@siglent.com)  
Website: [www.siglenteu.com](http://www.siglenteu.com)

Follow us on  
Facebook: [SiglentTech](https://www.facebook.com/SiglentTech)

